

TMAX 500

trafimet
distribution3 - 4,6 m
10' - 15'1,4 Kg
3,2 lb1 m
3,3'

V peak 113

mm 1,0 - 2,0 mm
.040" - 5/64"X 60% 550A CO₂
500A Mix

| CODE | ↔ | ⚡ |
|--------|-------------|-----------|
| MA6485 | 3 m / 10' | EURO - TW |
| MA6486 | 4 m / 12' | EURO - TW |
| MA6487 | 4,6 m / 15' | EURO - TW |

| | | |
|---------|-------------|----------|
| MA6494T | 3 m / 10' | TWECO® |
| MA6495T | 4 m / 12' | TWECO® |
| MA6496T | 4,6 m / 15' | TWECO® |
| MA6494M | 3 m / 10' | MILLER® |
| MA6495M | 4 m / 12' | MILLER® |
| MA6496M | 4,6 m / 15' | MILLER® |
| MA6494L | 3 m / 10' | LINCOLN® |
| MA6495L | 4 m / 12' | LINCOLN® |
| MA6496L | 4,6 m / 15' | LINCOLN® |

| CODE | ↔ | ⚡ |
|--------|-------------|------------|
| MA6494 | 3 m / 10' | 5/8-18 UNF |
| MA6495 | 4 m / 12' | 5/8-18 UNF |
| MA6496 | 4,6 m / 15' | 5/8-18 UNF |

Liner included




| CODE | KIT |
|--------|----------------|
| AR0170 | Tweco® 1/4 KIT |
| AR0172 | Lincoln® KIT |
| AR0173 | Miller® KIT |

Kit to be assembled
by a qualified technician


EURO - TW



TWECO®



MILLER®



LINCOLN®





5/8-18 UNF

trafimet
welding & cuttingTMAX
EVOLUTION OF THE SPECIES

EN 60974-7







ME0368
copper




| Ø mm | Ø in | Cu for Al | CuCrZr |
|------|------|-----------|------------------|
| 0,8 | .030 | | MD0250-78 |
| 0,9 | .035 | | MD0250-79 |
| 1,0 | .040 | | MD0250-80 |
| 1,2 | .045 | MD0250-62 | MD0250-82 |
| 1,4 | .052 | | MD0250-84 |
| 1,6 | 1/16 | MD0250-66 | MD0250-86 |
| 2,0 | 5/64 | | MD0250-90 |
| 2,4 | 3/32 | | MD0250-94 |

| MC0298 | MC0011 | MC0012 | MC0013 |
|--------|--------|--------|--------|
|--------|--------|--------|--------|



STANDARD

(REF.)

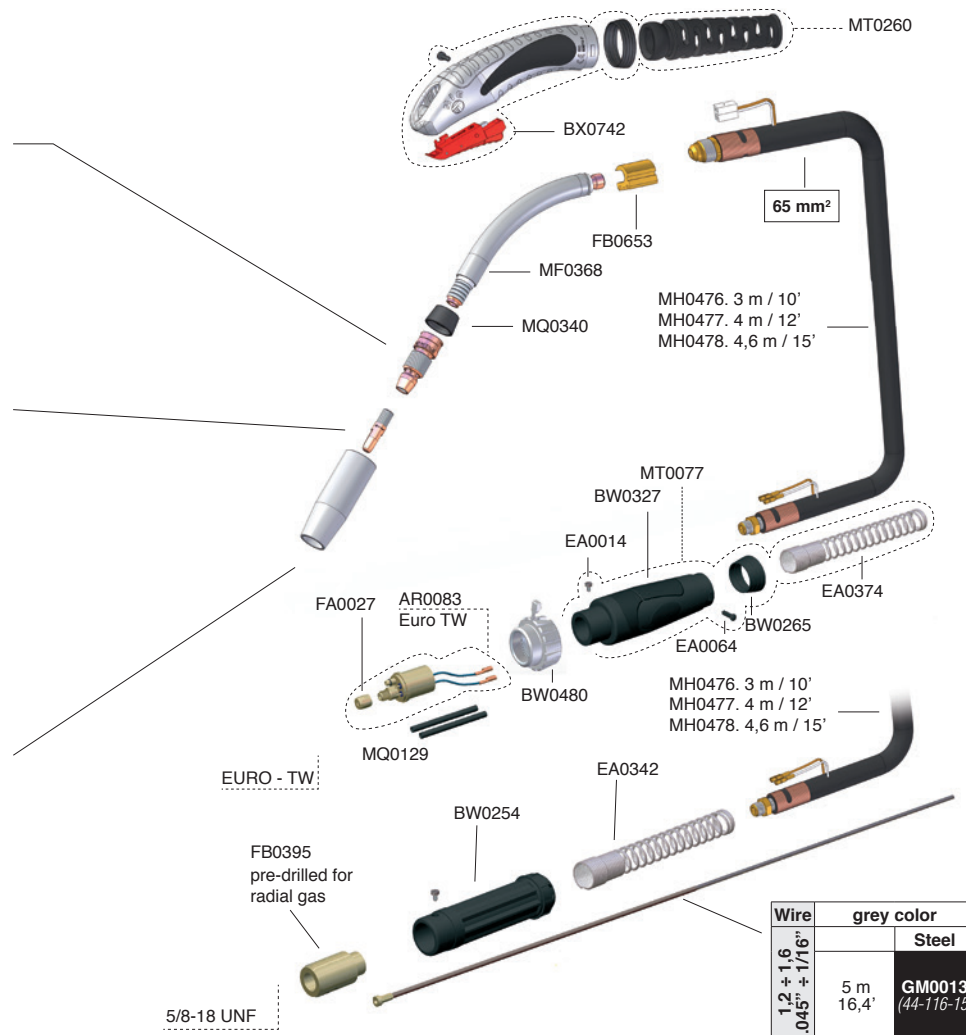

| Wire | grey color | |
|---------------------------|--------------|------------------------------|
| | | Steel |
| 1,2 ± 1,6 .045 ± 1/16" | 5 m 16,4' | GM0013 (44-116-15) |